


TECHNICAL DATA

Max.Operating pressure:	350	bar
Rated flow:	40	l/min
Cavity-Tooling:	11A-3	
Installation torque:	40-50	Nm
Weight:	0.19	kg

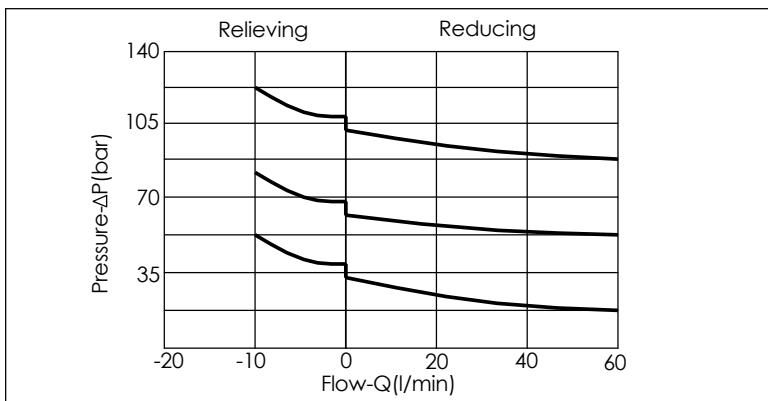

X	OPERATION	
30	Standard Type	
Maximum Leakage (33 cc/min./70 bar)		

Y	SPRINGS	
	ADJUSTMENT RANGES	
A	35 to 210 bar	(50 bar Standard Setting)
B	3.5 to 105 bar	(14 bar Standard Setting)
D	1.7 to 55 bar	(14 bar Standard Setting)
E	1.7 to 28 bar	(14 bar Standard Setting)
H	7 to 210 bar	(50 bar Standard Setting)
S	1.7 to 14 bar	(7 bar Standard Setting)
W	50 to 315 bar	(70 bar Standard Setting)

Z	OPTIONS	
L	Leakproof hex. socket screw.	
LP	Leakproof hex. socket screw. With stainless steel external metal components	
C	Stainless Steel Tamper Resistant Cover.	