


TECHNICAL DATA		
Max. pressure:	350	bar
Rated flow:	320	l/min
Cavity-Tooling:	16A-2	
Installation torque:	200-215	Nm
Weight:	0.42	kg

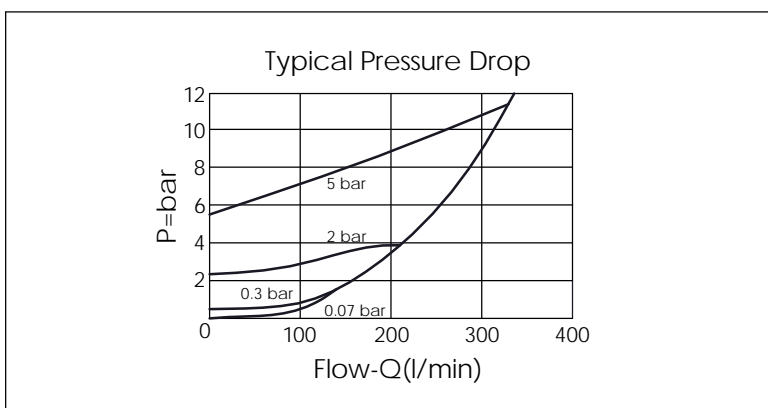

Y	SPRINGS	
	Cracking pressure	
007	0.07 bar	
015	0.15 bar	
01	0.1 bar	
03	0.3 bar	
10	1.0 bar	
20	2.0 bar	
35	3.5 bar	
50	5.0 bar	
70	7.0 bar	
105	10.5 bar	

X	OPERATION	
20	1 to 2 (Free Flow)	

Z	OPTION	
N	Non-adjustable	